




POST TOP LIGHTING

L70
25°C
362,000 Hours

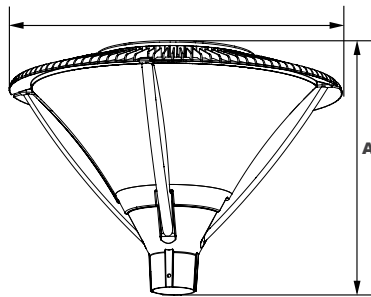

Dimensions

Diameter (D)	26 3/4" (679mm)
Height (A)	19 5/8" (505mm)

Pemco's SKY81RD Skylight Architectural Enclosed Large Round Post Top is available in a Type V distribution designed to replace HID lighting systems up to 1000w MH or HPS. The fixture mounts to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements

Specifications and Features:

Housing:

Die Cast Aluminum Housing, Integral Heat Sinking. Photocell Adaptable.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

Finish:

Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Clear UV-Stabilized Polycarbonate Array Lens to Seal LED Array. Prismatic Clear UV-Stabilized Polycarbonate Vandal-Resistant Outer Conical Lens.

Mounting Options:

Accommodates "P3" 2 1/8" O.D. x 3" Tenons

EasyLED LED:

Aluminum Boards

Wattage:

100w Array: 100w, System: 108w; (150-250w HID Equivalent)
 176w Array: 176w, System: 190w; (400-1000w HID Equivalent)
 276w Array: 276w, System: 293w; (400-1000w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.





POST TOP LIGHTING

Quick Ship option for Standard heights & colors only

Order Information Example: SKY81RDF1X176U5KCBSP

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
SKY81RD Skylight Enclosed Large Round Post Top	F F=Type V	1X100 =100w 1X176 =176w 1X276 =276w	U =120-277V H =347-480V	3K =3000K* 4K =4000K 5K =5000K *176w Type V Only	C C=Clear UV-Stabilized Polycarbonate Outer Conical Lens	B =Black C =Custom (Consult Factory)	P2AB =PSRTN Tenon Adaptor, Black P2AC =PSRTN Tenon Adaptor, Custom Color (Consult Factory) SF =Single Fuse* DF =Double Fuse* SP =Surge Protection R3 =3-Pin Twist Lock Photocell Receptacle R5 =5-Pin Twist Lock Photocell Receptacle R7 =7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S2 =Microwave Sensor with Dimming for Mounting Heights of 8' to 40'.* S4 =Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'.* *120-277V Models Only.

Accessories & Replacement Parts:

Mounting Accessories (Order Separately, Field Installed)

PSRTN* Retrofit Tenon Adaptor, Die Cast with Powdercoat Finish, Hardware Included. Converts a 2 3/8" x 4" Pole Tenon to a 2 1/2" x 3" Tenon.

*Specify Color: B=Black, C=Custom (Consult Factory)



PSRTN

Accessories (Order Separately, Field Installed)

- P18131 Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
- P18132 Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.
- P18140 110-120VAC Instant Twist Lock Photocell
- P18150 120VAC Time Delay Twist Lock Photocell
- P18152 277VAC Time Delay Twist Lock Photocell
- P18156 120-277VAC Universal Twist Lock Photocell
- P18157 480VAC Time Delay Twist Lock Photocell. For 480V use only.



P18131



P18132



P18140



P18150



P18156
P18157

Replacement Parts (Order Separately, Field Installed)

- PF80PC Clear UV-Stabilized Polycarbonate Outer Conical Lens.
- P17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz
- P17123 Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz



PF80PC



P17117



P17123


EPA (Effective Projected Area)

EPA (Sq. Ft.)	Weight (Lbs.)
3.20	32 Lbs



POST TOP LIGHTING

Photometric Data

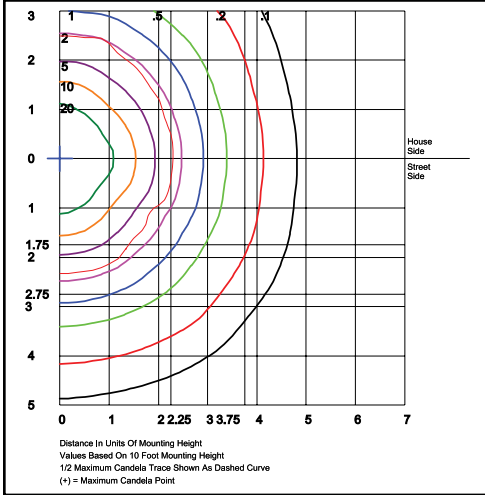

SKY81RDF1X276U5KC, Clear Lens

Type V
Grid in MH
MH=10 Feet

Photometric Performance

"Wattage (Catalog Logic)"		100W (1X100)	176W (1X176)	276W (1X276)
Input Watts		108.2W	190.4W	292.5W
Optic	CCT	Delivered Lumens		
F=Type V	3000K	-	15,299	25,913
	4000K	-	18,818	26,745
	5000K	-	16,405	27,787
	BUG Rating	-	B3-U2-G2	B4-U0-G3

Projected Lumen Maintenance

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 293w	1.00	0.98	0.96	0.92	362,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.92	0.84	183,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.97	0.94	0.88	167,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.