



**RADIANT™ LED POST TOPS**



EPA: 1.7  
 WEIGHT: 26 lbs.

**Specifications and Features:**

**Radiant™ LED**

- Conformal Coating LED light engine
- CCT: Amber, LPS (1800K), 2200K, 2700K, 3000K, 4000K, 5000K
- Static Colors Available - Contact Factory

**Distribution**

- Types I\* II, III, IV, V (Type I available in 70w & higher only)
- Full Cutoff (No Lens option only)

**Electrical**

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10V Dimmable Driver
- Standard Surge Protection included (6kV line-line; 10k-V line-earth)

**Controls (Adder)**

- Button eye photo control (PC)
- 7-pin twist-lock receptacle (PCR7) - mounts on top with GF26 (Y)
- 3-pin twist-lock receptacle (PCR3)

**Housing**

- Cast aluminum cage, roof and 3" slip fitter

**Finish**

- Super durable polyester powder coat finish. Custom finishes available, including patinas and all RAL colors.

**Listings & Ratings**

- ETL listed to UL 1598 standard for wet location
- LED is IP66 Rated

**Warranty**

- 5 year limited warranty



**Order Information Example: HER1NL60W4KU3ANNBK**

HER1	Model	Globe/Lens	LED Module	Voltage	Distribution	Finial	Mounting	Options	Finish (Standard Colors)
HER1=Heritage	NL=No Secondary Lens CA=Clear Acrylic CP=Clear Polycarbonate FA=Frosted Acrylic FP=Frosted Polycarbonate TG=Flat Tempered Glass, Clear FG=Flat Tempered Glass, Frosted WA=White (Opal) Acrylic PA=Pattern Acrylic	See Chart on Page 2*  *Amber, LPS and 2200K not available for Quick Ship	U=120-277V H=347/480V	1=Type I* 2=Type II 3=Type III 4=Type IV 5=Type V  *70W & above only	A=GF1 B=GF2 C=GF3 D=GF4 H=GF8 S=GF21 U=GF23 V=GF24 Y=GF26 N=None	N=None (Standard Post Mount) PEN=Pendant Mount CWB6=Cast Wall Bracket for 6" Wall Mount CWB15=Cast Wall Bracket for 15" Wall Mount SCROLLS=Scrolls	N=None PC=Button Eye Photo Control GCL=Glass Chimney, Large PCR3=3 Pin Twist Lock Receptacle (photo cell not included) PCR7=7 Pin Twist Lock Receptacle (photo cell not included)*  *Must use GF26 (Y) Finial	BK=Black BZ=Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic GY=Light Gray TBK=Textured Black CC=Custom Color (Consult Factory)	



**RADIANT™ LED POST TOPS**



12" Radiant™



8" Radiant™

**Lumen Output for Heritage Radiant**

			No Lens				Clear Lens				Frosted			
CCT	LED Module	Input Watts	Type 2	Type 3	Type 4	Type 5	Type 2	Type 3	Type 4	Type 5	Type 2	Type 3	Type 4	Type 5
5K	40W5K	40	4036	4110	4178	4288	3899	3933	3998	4093	3749	3781	3843	3949
	50W5K	50	5047	5091	5175	5312	4830	4872	4952	5070	4643	4684	4761	4892
	60W5K	60	6008	6060	6160	6323	5749	5799	5895	6036	5528	5576	5667	5824
	70W5K	70	7068	7130	7247	7439	6764	6823	6935	7101	6503	6560	6668	6851
	80W5K	80	8072	8142	8276	8496	7725	7792	7920	8110	7426	7491	7614	7824
4K	90W5K	90	9083	9162	9313	9559	8692	8767	8912	9125	8356	8429	8568	8804
	40W4K	40	3844	3877	3941	4046	3678	3710	3771	3862	3536	3567	3626	3726
	50W4K	50	4807	4848	4928	5059	4600	4640	4716	4829	4422	4460	4534	4659
	60W4K	60	5722	5772	5867	6022	5476	5523	5614	5749	5264	5310	5398	5546
	70W4K	70	6732	6790	6902	7085	6442	6498	6605	6763	6193	6247	6350	6525
3K	80W4K	80	7688	7755	7882	8091	7357	7421	7543	7723	7073	7134	7252	7452
	90W4K	90	8650	8726	8869	9104	8278	8350	8487	8690	7958	8028	8160	8385
	40W3K	40	3690	3722	3784	3884	3531	3562	3621	3707	3395	3424	3481	3577
	50W3K	50	4614	4654	4731	4856	4416	4454	4527	4636	4245	4282	4353	4472
	60W3K	60	5493	5541	5632	5781	5257	5302	5390	5519	5054	5098	5182	5324
27K	70W3K	70	6463	6519	6626	6802	6184	6238	6341	6492	5946	5997	6096	6264
	80W3K	80	7380	7444	7567	7767	7062	7124	7241	7414	6790	6849	6962	7153
	90W3K	90	8304	8377	8515	8740	7947	8016	8148	8343	7640	7707	7833	8049
	40W27K	40	3460	3490	3547	3641	3311	3339	3394	3476	3183	3210	3263	3353
	50W27K	50	4326	4364	4435	4553	4140	4176	4244	4346	3980	4014	4081	4193
27K	60W27K	60	5150	5195	5280	5420	4928	4971	5053	5174	4738	4779	4858	4992
	70W27K	70	6059	6111	6212	6377	5798	5848	5945	6087	5574	5622	5715	5873
	80W27K	80	6919	6979	7094	7282	6621	6679	6789	6951	6366	6421	6527	6706
	90W27K	90	7785	7853	7982	8194	7450	7515	7639	7821	7163	7225	7344	7546

\*\*20% LLF for White/Opal Lens

Please refer to fixture's IES files for detailed information. Subject to change.




**Contact the factory for Amber, LPS and 2200K lumen output**



**RADIANT™ LED POST TOPS**



**Mounting Options:**

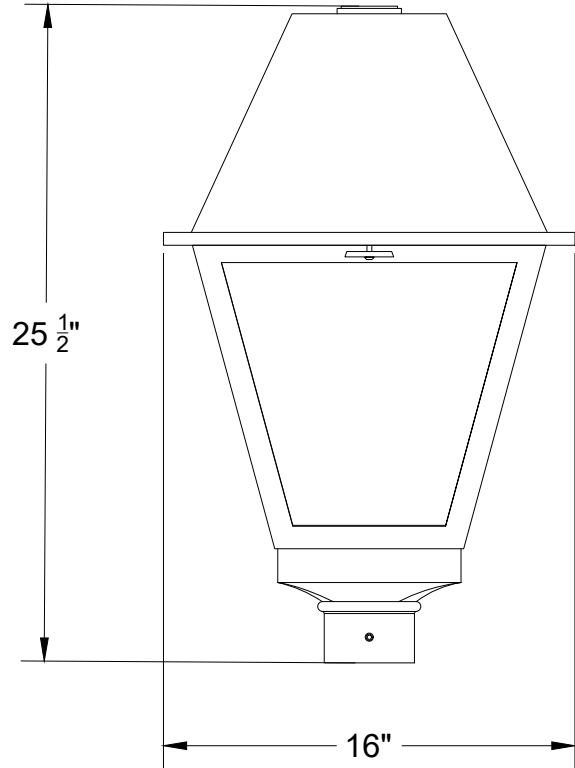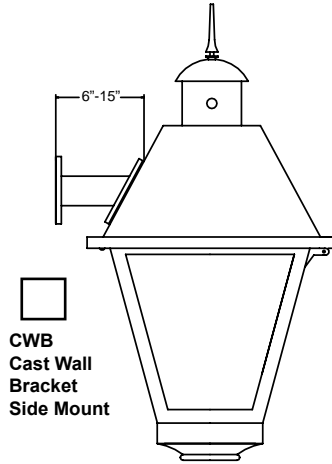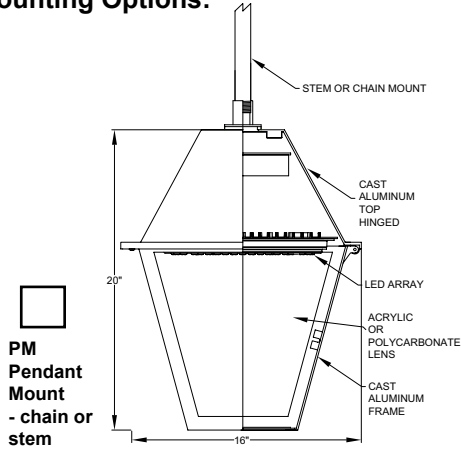

**Finials**



GF1 - 6.5"



GF2 - 6"



GF3 - 6"



GF4 - 6"



GF8 - 4"



GF21 - 8"



GF23 - 8.5"



GF24 - 4.75"



GF26 - 4.25"