





BOLLARD LIGHTING

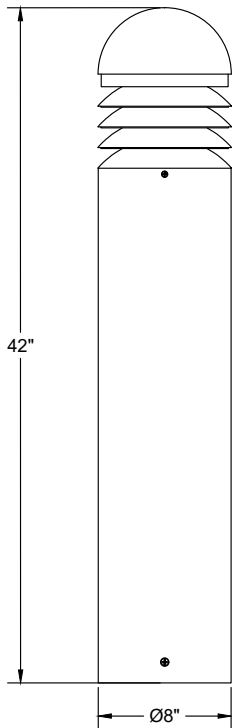

Specifications and Features:

Radiant™ LED

- Conformal Coating LED light engine
- CCT: Amber, LPS (1800K), 2200K, 2700K, 3000K, 4000K, 5000K
- Static Colors Available - Contact Factory

Optical

- Type V

Electrical

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10v Dimmable Driver
- Standard Surge Protection included (6kV line-line; 10k-V line-earth)

Controls (Optional)

- Button Eye Photo Control (PC)
- House Side Shield (H)

Housing

- A heavy gauge cast aluminum dome secured to louvers with concealed, tamper-proof stainless steel hardware

Finish

- Super durable polyester powder coat finish.
- Custom finishes available, including patinas and all RAL colors

Listing & Ratings

- ETL listed to UL 1598 standard for wet location
- LED is IP66 Rated

Warranty

- 5 year limited warranty

Order Information Example:

CAV642CA20W4KU5PCBK

CAV6					5		
Model	Height	Globe/Lens	LED Module	Voltage	Distribution	Options	Finish (Standard Colors)
CAV6=Cavalier 6 - 7 3/4" Round Bollard	42=42" (standard) 36=36" (adder) 30=30" (adder) 24=24" (adder)	CA=Clear Acrylic	See Chart on Page 2	U=120-277V H=347/480V	5=Type V	N=None PC=Button Eye Photo Control H=House Side Shield USB=Dual USB Port* GFIC=GFI in-use cover, cast aluminum* GFIP=GFI in-use cover, plastic* *Indicate location	BK=Black BZ=Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic GY=Light Gray TBK=Textured Black CC=Custom Color (Consult Factory)



BOLLARD LIGHTING



6" Radiant™

Photometric Data				
CCT	LED Module	Input Watts	Type 5	BUG Rating
5K	10W5K	10	39	B0-U1-G0
	15W5K	15	59	B0-U1-G0
	20W5K	20	78	B0-U1-G0
	25W5K	25	98	B0-U1-G0
	30W5K	30	118	B0-U1-G0
4K	10W4K	10	37	B0-U1-G0
	15W4K	15	56	B0-U1-G0
	20W4K	20	75	B0-U1-G0
	25W4K	25	93	B0-U1-G0
	30W4K	30	112	B0-U1-G0
3K	10W3K	10	35	B0-U1-G0
	15W3K	15	53	B0-U1-G0
	20W3K	20	71	B0-U1-G0
	25W3K	25	89	B0-U1-G0
	30W3K	30	106	B0-U1-G0
27K	10W27K	10	35	B0-U1-G0
	15W27K	15	52	B0-U1-G0
	20W27K	20	69	B0-U1-G0
	25W27K	25	87	B0-U1-G0
	30W27K	30	104	B0-U1-G0
22K	10W22K	10	33	B0-U1-G0
	15W22K	15	50	B0-U1-G0
	20W22K	20	67	B0-U1-G0
	25W22K	25	84	B0-U1-G0
	30W22K	30	101	B0-U1-G0
LPS	10WLPS	10	33	B0-U1-G0
	15WLPS	15	49	B0-U1-G0
	20WLPS	20	65	B0-U1-G0
	25WLPS	25	82	B0-U1-G0
	30WLPS	30	98	B0-U1-G0