



NARROW BEAM HIGHBAY


L70
25°C **302,000 Hours**



**Microwave Sensor
Factory Installed "M3"
Option (120-277V Only)**



MOUNTING up to 50 FEET

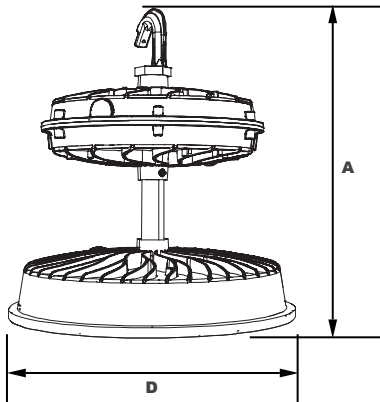

Dimensions

Diameter (D)	16 1/4" (413mm)
Height (A)	16 1/4" (413mm)

Pemco's EasyLED Chesapeake 16" Narrow Beam High Bay is designed to replace HID lighting systems up to 400w MH. Typical applications are high ceiling industrial, manufacturing, military and large aircraft hangar facilities. Suitable for 30 to 50 foot mounting heights based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Aluminum Housing with External Heat Sinks for Cooler Operating Temperatures. Includes 4" Stem.

Listing & Ratings:

CSA: Listed for Damp Locations, ANSI/UL 1598, 8750 (Lens Gasket Use Required); IP65 Sealed LED Compartment.

Finish:

White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Tempered Clear Flat Glass Lens

Mounting Options:

Mount with Included 1" Die Cast Hook.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 169w; System: 178.5w; (400w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.



DesignLights Consortium™
Qualified Luminares:
contact factory for part#s*





NARROW BEAM HIGHBAY

Order Information Example: **CSP44QI1X169U5KGWSP**

CSP44Q	I	1X169		5K	G		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
CSP44Q =EasyLED Chesapeake 16" LED Highbay	I=Narrow Beam	1X169 =169w	U =120-277V H =347-480V	5K =5000K	G =Clear Flat Glass Lens	W =White C =Custom (Consult Factory)	SF =Single Fuse* DF =Double Fuse* SP =Surge Protection M3 =Microwave Sensor for Mounting Heights of 20 Feet or Above.* CP6120W =6' White Cord, 3 Wire, L5-15P Twist-Lock Plug CP6277W =6' White Cord, 3 Wire, L7-15P Twist-Lock Plug C6600B =6' Black Cord, STW, 600VAC, 3 Wire, Leads C6600W =6' White Cord, STW, 600VAC, 3 Wire, Leads C4600B =4' Black Cord, SEOW, 600VAC, 3 Wire, Leads BU =Battery Backup* BUC =Cold Start Battery Backup, -20°C, 90 Minutes* *120-277V Models Only.


Lens Options:



CSP44Q Shown with Tempered Clear Flat Glass Lens (G)

Accessories & Replacement Parts:

Accessories (Order Separately, Field Installed)	
CSP44WG	Wire Guard, Fits CSP44, for Use with Flat Glass Lenses.
CPSC	Safety Cable, 3' Steel Cable with Clear Vinyl Coating, Steel Eye & Loop Ends.



CSP44WG



CPSC

Replacement Parts (Order Separately, Field Installed)	
HBGL16	16" Tempered Clear Flat Glass Lens
HBCB16	16" Clampband
CPMH3	Die Cast Hook with 1" NPS Threads
P17116	Microwave Sensor for Mounting Heights of 20 Feet or Above (120-277V Only).

Replacement BU Available-Consult Factory.




P17116



NARROW BEAM HIGHBAY

Photometric Data

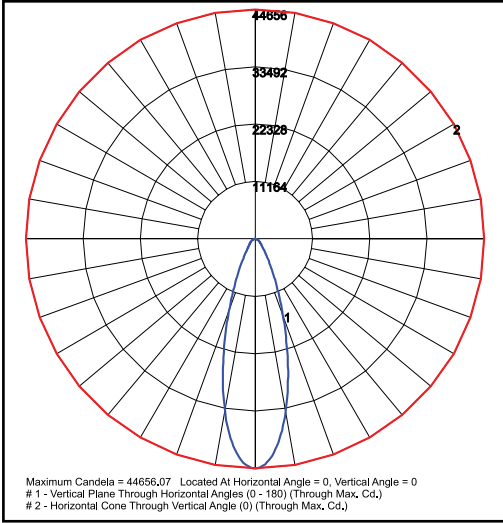

CSP44QI1X169U5KG -
Clear Glass Lens

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Spacing Criteria	5000 CCT 80 CRI	
				Lumens	LPW
EasyLED 169w with Clear Glass (G)	525	179	0.54	20,292	113

Projected Lumen Maintenance

Data shown for 5000 CCT	Input Watts	Compare to MH				Calculated LED Life
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	
L70 Lumen Maintenance @ 25°C / 77°F	179	1.00	0.98	0.95	0.90	302,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.94	0.88	0.76	124,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.91	0.83	117,000

NOTES:
 1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
 2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.